

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16635 A1

(51) International Patent Classification⁷: G02B 6/42

(21) International Application Number: PCT/BG00/00022

(22) International Filing Date: 2 August 2000 (02.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
103695 27 August 1999 (27.08.1999) BG

(71) Applicants and

(72) Inventors: GEORGIEV, Goran Dimitrov [BG/BG];
Apartment 64, Zona B-19, Bl. 11-12, vhd A, et.17, 1309
Sofia (BG). IVANOV, Alexander Eftimov [BG/BG];
Apartment 24, "Alej Wazrazhdane" No 14, et.6, 7000
Russe (BG).

(74) Agent: DIMITROVA, Hristina Tzolova; Apartment 10,
bul. "Tzar Oswoboditel" No 25, et.3, 1504 Sofia (BG).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR CONNECTION AND ADJUSTMENT OF OPTICAL UNITS: ELEMENTS, MOD-
ULES, DEVICES, AND SYSTEMS

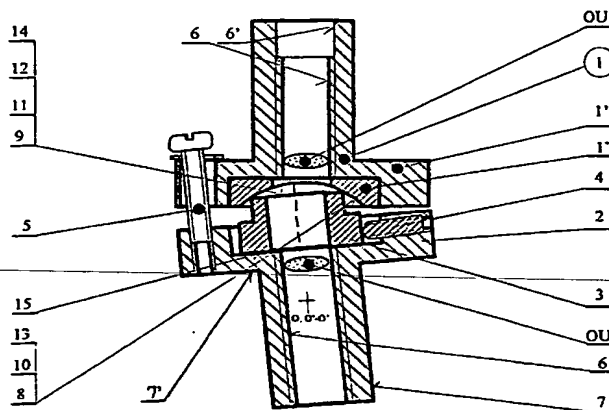

(57) Abstract: The device comprises at least one triad of two end carriers (1, 2) and an interstitial body (3), the three bodies being hard and forming an optical channel with a rectilinear axis in the case of one triad of bodies, or angularly refracted or branched in the case of more than one triad with a common, immovable body (1 or 2 or 3). One of the end bodies (1 or 2) and the interstitial body (3) are connected by a spatial hinge, while the other end body (2 or 1) and the interstitial body (3) are connected in a common slip plane. The contact surfaces of the hinge are either a part of a concave sphere (8) and a base of a circular cylinder (9), or a part of a concave cylinder (10) and a base of a parallelepiped (11) or cube (12), or a part of a concave ellipsoid (13) and of an elliptic cylinder (14). Each concave surface (8, 10, 13) has a centre (0) or a central axis (0'-0') disposed either between the hinge bodies or in one of the end bodies or outside the three bodies. Each of the bodies connected in a slip plane has a frontal contact plane (15) transversal to the axis thereof. The movable bodies are connected and locked by the same coupling and locking screws (4, 5) arranged by groups and situated in one of two bodies of each triad. The axes of the screws of the two groups are mutually crossing and/or perpendicularly intersecting.

WO 01/16635 A1